(12)

EUROPEAN PATENT APPLICATION

(71) Applicant: **Nippon Steel Corporation**
6-3 Ohte-machi 2-chome Chiyoda-ku
Tokyo 100(JP)

(72) Inventor: **Fukuda, Keiji c/o Daisan Gijutsu Kenkyusho**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Suzuki, Takefumi c/o Daisan Gijutsu Kenkyusho**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Kageyama, Hideaki c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Makino, Yoshiaki c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Hisatsune, Masanori c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Matsubara, Eigo c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Ishii, Mitiaki c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Sato, Manabu c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(72) Inventor: **Koyama, Haruo c/o Yahata Factory**
Nippon Steel Corporation 1-1, Edamitsu-1-chome
Yahatahigashi-ku Kitakyushu-shi(JP)

(74) Representative: **Arthur, Bryan Edward et al,**
Withers & Rogers 4 Dyer's Buildings Holborn
**London EC1N 2JT(GB)**

(54) Method of and apparatus for heat treating rails.

(57) A method of heat-treating a rail for obtaining a variety of strength levels from medium value to high value. The method has the steps of: preparing a steel rail maintained at a high temperature region not lower than the austenite field, and disposing a nozzle means around the head of the rail such that the nozzle means can direct a gaseous cooling medium towards the head of the rail; determining the distance between the nozzle means and the head of the rail in accordance with both the hardness level to be attained in the head of the rail and the carbon equivalent of the steel constituting the rail; moving the nozzle means such that the distance is attained between the nozzle means and the head of the rail; and directing the gaseous cooling medium towards the head at a predetermined flow rate and for a predetermined time so as to cool the head of the rail thereby attaining the desired hardness level in the head of the rail.

./...

EP 0 186 373 A2

FIG. 1
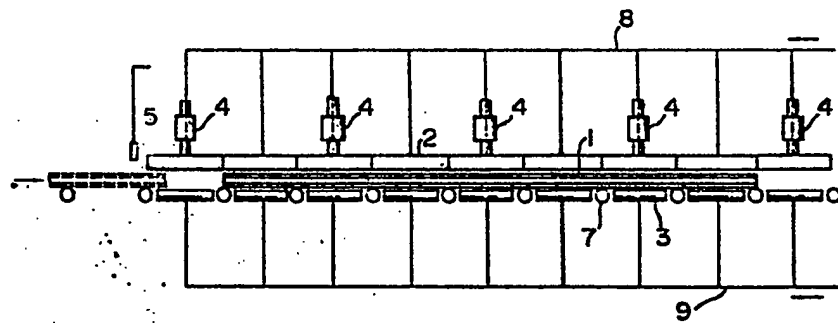
- 1 -

METHOD OF AND APPARATUS FOR HEAT-TREATING RAILS

1 BACKGROUND OF THE INVENTION

The present invention relates to a heat-treating method and apparatus which can produce rails of a variety of strength levels by cooling the rails from a temperature range in austenite range after hot rolling or after a heating for the purpose of the heat treatment.

The current trend for heavier axle load and higher speed in railroad transportation has caused a tendency of rapid wear and fatigue of the rail heads, which in turn has given rise to the demands for rails having higher anti-wear and anti-damage properties, and for rails of various levels of strength from medium level strength (Hv > 320) to high level strength (Hv > 360).

Such a demand has been met, as confirmed through studies, by steel rails having fine pearlite structure. It is well known that this type of rails exhibit superior anti-wear and anti-damage properties.

An alloy steel rail as a prior art is disclosed in Japanese Unexamined Patent Publication No. 140316/1975. This rail is made of an alloy steel which is obtained by adding elements such as Si, Mn, Ni, Cr, Mo and Ti to a carbon steel, and is us d in an as-rolled state. Japanese Examined patent Publication No. 23885/1980 disclos s another prior art rail of a kind d scribed below. This rail does not contain any alloy elements but th head

1   portion of this rail is re-heat d to a high temperature

and is cooled from a predet rmined temperatur region

with a control of the cooling rate throughout a certain

temperature range.

5   The known rails, however, suffer from the

following disadvantages.

        Namely, the rail of the first mentioned type with

its composition controlled by addition of alloy elements,

intended for use in an as-rolled state, necessitates a

10 large amount of alloy elements. These elements are

generally expensive so that the cost of production of the

rail is raised undesirably.

        The rail of the second-mentioned type is produc-

ed typically by directing a cooling medium such as water

15 and gas to the head of the rail material which has been

heated to a high temperature, thereby forcibly cooling

the rail head from the high temperature. This method is

effective only when rails of a given strength are to be

produced, and is not suited to the case where rails of

20 a variety of strength levels are to be obtained. Although,

in the production of this type of level, contents of

carbon and other alloy elements added to the material

fluctuate in the step of steel making which carbon and

alloy elements substantially determine the level of the

25 strength of the rails, it has been impossible to compensate

the fluctuation with th result that rails of desired

str ngth lev l can not be obtain d in the prior art.

SUMMARY OF THE INVENTION

Accordingly, an object of the invention is to provide a heat-treatment method for rails which is suitable for production of rails having a variety of strength levels from medium value to high value while possessing required properties such as anti-wear and anti-damage properties.

Another object of the invention is to provide a heat-treatment method for rails which is suitable for the production of rails having a variety of strength levels and which can make substantially uniform the values of properties such as anti-wear and anti-damage properties over the entire cross-section of the rail head.

Still another object of the invention is to provide apparatus for carrying out the method of the invention, more particularly an energy-saving heat-treamtnet apparatus for hot-rolled rails, having a cooling zone of a reduced length and, hence, requiring only a small installation space.

To these ends, according to an aspect of the invention, there is provided a method of heat-treating a rail for obtaining a variety of rail hardness levels from medium value to high value, the method comprising the steps of: preparing a steel rail maintained at a high temperature region not lower than the austenite field, and disposing a nozzle means around the head of the rail such that the nozzle means can direct a gaseous cooling medium towards th head of th rail; d t rmining the distance between the nozzle means and the head of the rail

1   in accordance with both the hardness level to be attained

     in th head of th rail and the carbon equivalent of the

     steel consituting th rail; moving the n zzl means such

     that the distance is attained between the nozzle means and

5   the head of the rail; and directing the gaseous cooling

     medium towards the head at a predetermined flow rate and

     for a predetermined time so as to cool the head of the rail

     thereby attaining the desired hardness level in the head

     of the rail.

10   The carbon equivalent Ceq is given by the follow-

     ing formula:

          (C + Mn/6 + Si/24 + Ni/40 + Cr/5 + Mo/4 + V/14)

             The rail treated by the method of the invention

     is made of a steel having a stable pearlite structure

15   which steel consists essentially, by weight, of 0.55 - 0.85%

     C, 0.20 - 1.20% Si, 0.50 - 1.50% Mn and the balance Fe

     and incidental impurities. Chromium of 0.20 - 0.80 wt%

     may be added to the composition. Further, at least one

     kind selected from the group consisting of Nb, V, Ti,

20   Mo, Cu and Ni may be added to the composition.

             In a preferred form of the invented method,

     the cooling is effected in a controlled manner by means

     of a three-directional nozzle which is capable of direct-

     ing a gaseous cooling medium (air, N_2 and etc.) independent-

25   ly in three directions, i.e., towards the top surface and

     both side surfaces of the rail head at constant rates.

     The gaseous cooling medium used in th cooling is exhaused

1   from both gauge corners and both roots of the rail head.

With this method, it is possible to attain a uniform

hardness distribution over the entire portion of the

rail head including the top surface, gauge corners, side

5   surfaces and the lower jaw surfaces, while preventing

excessive hardening or generation of undesirable structure

such as bainite in the gauge corners which are apt to be

overcooled.

According to another aspect of the invention,

10   there is provided a heat-treatment apparatus for carrying

out the heat-treating method for obtaining rails of a

variety of rail hardness levels from medium value to high

value, the apparatus comprising:

conveyor means for conveying said rail;

15   a rail head cooling means having a plurality of

nozzles arranged around the head of said rail and adapted

for directing a gaseous cooling medium towards the head

of said rail; and

a rail bottom cooling means disposed under the

20   conveyor means and adapted to direct said gaseous cooling

medium towards the bottom surface of the rail;

wherein the rail head cooling means is movable

for allowing the distance between said nozzles and the head

of the rail.

25   BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side elevational view of a first

embodiment of th cooling apparatus suitable for use in

1 carrying out the first embodiment of the heat-treatment

   m thod in accordance with the invention;

           Fig. 2 is an enlarged sectional view of a

   portion of the cooling apparatus shown in Fig. 1;

5   Fig. 3 is a graph showing a cooling curve

   indicating the cooling rate of a rail head cooled in

   accordance with an embodiment of the method of the inven-

   tion;

           Figs. 4 and 5 are graphs which show the results

10 of measurement of hardness in the cross-sections of rails

   heat-treated in accordance with the method of the inven-

   tion;

           Figs. 6a and 6b are illustrations of a nozzle

   header of a rail-head surrounding type and the pattern

15 of flow of the gaseous cooling medium;

           Figs. 7a and 7b show the results of measurement

   of hardness of cross-sections of rails which have been

   heat-treated by the cooling nozzle of the type shown in

   Fig. 6a;

20   Fig. 8 is an illustrations of names of various

   parts of the surface region of cross-section of a rail

   head;

           Fig. 9 shows an example of a nozzle header

   incorporated in cooling apparatus suitable for use in

25 carrying out a second embodiment of the heat-treatment

   method in accordance with the invention;

           Figs. 10a and 10b show the results of measur -

   ment of hardness of the cross-sections of rails which have

1 been heat-treated by the second embodiment of the heat-

treatment method in accordance with th invention;

Figs. 11a and 11b are chart showing hardness

distributions at depths of 1 to 1.5 mm below the rail

5 head surfaces of rails treated by the first and second

embodiments of the heat-treatment method of the invention

in comparison with each other.

Figs. 12a and 12b are illustrations of bending

of rails during cooling;

10 Fig. 13 is a side elevational view of a cooling

apparatus employed in connection with the method for

preventing bending of rail;

Fig. 14 is an enlarged sectional view of a

portion of the cooling apparatus employed in connection

15 with the apparatus in Fig. 13;

Fig. 15 is a chart showing the changes in air

flow rates in the upper and lower regions of a rail

during cooling while preventing the bending of rail;

Fig. 16 is a chart showing the change in the

20 bend of a rail which is being cooled in accordance with

the embodiment shown in Fig. 13;

Fig. 17 is an illustration of the result of

measurement of hardness in a cross-section of a rail heat-

treated in accordance with the embodiment shown in Fig. 13;

25 and

Fig. 18 is a front elevational view of an embodi-

ment of a heat-treatment apparatus suitable for use in

carrying out the method of the invention.

1   DESCRIPTION OF THE PREFERRED EMBODIMENTS

          Figs. 1 and 2 schematically show an exampl of a

first apparatus which is suitable f r use in carrying out

a first embodiment of the heat-treatment method in accord-

5   ance with the invention. Referring first to Fig. 1, a

rail 1 has been hot-rolled or heated for the purpose of

heat-treatment, and is held at a temperature region not

less than Ar_3 temperature. The heating to the temperature

not less than the Ar_3 temperature is essential for obtaining,

10   through an accelerated cooling, a fine pearlite structure

which exhibits superior anti-wear and anti-damage pro-

perties. An upper nozzle header of a type semi-circularly

surrounding the head of rail is extended in the direction

of movement of the hot rail 1, i.e., in the longitudinal

15   direction of the same. The header 2 has a nozzle which

is adapted to direct a gaseous cooling medium such as air

or N_2 gas onto the top surface and both side surfaces of

the head of the hot rail 1. A lifting device 4 is provided

for lifting and lowering the header 2 as desired. A

20   thermometer 5 disposed at the inlet side of the cooling

apparatus is adapted to measure the temperature θ_s of

the top surface of the head of the hot rail 1. As will

be seen from Fig. 2, the nozzles of the upper nozzle

header 2 are arranged on a common arc so that they direct

25   the cooling medium towards the center of the rail head,

thus ensuring uniform cooling of the rail head surface

and, h nc , uniform strength distribution. A r ference

num ral 3 designates a lower nozzle header which is provided

1 for movement in the direction of movement of the hot

rail 1, i.e., in the longitudinal direction of the same,

as is the case of the upper nozzle header, and is adapted

to direct a gaseous cooling medium towards the center of

5 the bottom surface of the hot rail 1. The lower nozzle

header is intended for functioning as means for controlling

the shape of the rail 1.

A description will be made hereinunder as to

the first embodiment of the heat-treatment method of the

10 invention, as well as the operation of the first cooling

apparatus. It is assumed here that air is used as the

gaseous cooling medium.

As stated before, the hot rail 1 is maintained

at a temperature region not less than the Ar_3 temperature,

15 as it has just been hot-rolled or heated intentionally

for the purpose of the heat treatment. Before commencing

the heat treatment, the carbon equivalent Ceq of the rail

material has been determined by elementary analysis,

whereas various conditions such as the hardness Hv to be

20 obtained, flow rate Q of air used in the cooling and the

upper header pressure P are given. When the nozzle header

shown in Fig. 2 is used, the distance H between the upper

nozzle header 2 and the top surface of the rail head is

determined in accordance with the following formula (1):

25 $$Hv = 10^n + (200 \cdot Ceq - 190) \qquad \dots\dots\dots (1)$$

$$n = 2.4993 + 0.039887 \log F - 0.0051918 \log F^2$$

1 wher ,

Hv: hardness to be obtained through heat treatment

regarding the depth down to 10 mm from the rail

head surface (corresponds to strength) [Vicker's

5 hardness 10 Kg]

Ceq: carbon equivalent

F: degree of cooling

$F = Q \cdot \sqrt{P} / H$

Q: flow rate of gaseous cooling medium applied to

10 unit length of rail [$m^3/m \cdot min$]

P: nozzle header pressure

[mmAq, nozzle resistance coefficient f = 0.85]

H: distance between nozzle header and rail head (mm)

n: coefficient determined by the type of nozzle

15 The cooling apparatus shown in Fig. 1 is set

up such that the distance H determined as above is

maintained between the upper nozzle header 2 and the rail

head, and the rail 1 in the upright posture is fed in the

longitudinal direction thereof.

20 The surface temperature θ_s of the top surface of

the hot rail 1 is measured by the thermometer 5 provided

at the inlet side of the cooling apparatus, and the cooling

time T_{AC} is computed by using the thus measured tempera-

ture θ_s in accordance with the following formula (2).

$$T_{AC} \geq 0.336 \, \theta_s - 150 \text{ (sec)} \qquad \cdots \cdots \cdots \cdots (2)$$

1   The rail 1 is moved through the cooling apparatus

continuously or, as desired, intermittently or r cipro-

catingly, in accordance with the thus determined cooling

time T_{AC}, so as to be cooled continuously.

5   By effecting the control in accordance with the

conditions given by the formula (1), it is possible to

obtain heat-treated rails of desired levels of strength

and having superior anti-wear and anti-damage properties

while compensating the fluctuation of amounts of alloying

.0   elements. Namely, in one hand, there is a demand for

compensation for variation of strength due to fluctua-

tion of the amount of the alloy elements encountered in the

steel making process, while on the other hand there is a

demand for realizing means capable of obtaining a disered

.5   strength level of the rails in a wide variety range from

320 to 400 in terms of Hv (Vicker's hardness) with a single

cooling apparatus. The present inventors have found that

both these demands are met when the heat treatment is

controlled by using the conditions of the carbon equivalent

:0   Ceq and the distance H. Thus, the heat-treatment method

of the invention in accordance with the formula makes it

possible to eliminate any unfavourable effect of the

fluctuation of the alloy element contents, while affording

a wide range of strength level control and an efficient

:5   composition design. This method is effective particularly

in the control of the cooling of the hot-roll d rail from

the temperature region not lower than the Ar_3 temp rature.

    On the other hand, the formula (2) mentioned

1 before determines the cooling time. The h at treatment

in accordance with th invention may be conducted with

m asurem nt of rail temperature. The measurem nt is

conducted, for instance, at points as shown in Fig. 3:

5 Namely, at a point which is 5 mm below the rail head top

surface, a point which is 25 mm below the same and a

points which are 5 mm under the gauge corners. The

meqasuring point which is 25 mm below the head top surface

is located substantially at the center of the rail head.

10 If the cooling is conducted such that the temperature

at this point is lowered to a level near the peak tempera-

ture presented by the reheating caused due to the heat

of pearlite transformation, the pearlite transformation

is substantially completed almost over the entire area

15 of the head cross-section, so that the aimed strength

level is stably obtained even when the cooling is ceased.

Thus, the cooling time T_{AC} can be determined from the

measured temperature θ_s along the cooling curve, thus

allowing a stable operation of the cooling apparatus.

20 A description will be made hereinunder as to the

second embodiment of the heat-treatment method is accord-

ance with the invention, as well as a second cooling

apparatus suitable for use in carrying out this method.

In the first embodiment of the heat-treatment

25 method of the invention, the application of the cooling

medium onto the rail head such as a gas is conducted by

m ans of th nozzle header which continuously surrounds

the central top surface of the rail head and both side

1 surfaces of the rail head as shown in Figs. 6a or 6b.

When this type of nozzl header is used, the gaseous

cooling medium used in the cooling of the nozzle header

is exhausted downwardly along both side surfaces of the

5 rail head. In consequence, the cooling effect is progres-

sively weakened towards the lower side of both side

surfaces of the rail head, partly because the temperature

of the cooling medium is gradually raised and partly

because the impact of collision by the flow of the medium

10 impinging upon these side surfaces is lessened due to the

presence of the downward flow of the medium along these

surfaces. In addition, the lower surfaces of the jaw

portions cannot be cooled effectively. In consequence,

the hardness distribution becomes non-uniform over the

15 cross-section of the rail head. Namely, even though the

desired hardness is obtained in the region near the top

surface of the rail head, the regions near the side surfaces

of the head and the lower surfaces of the jaw portions

exhibit insufficient hardness. In addition, the hardness

20 is unstable in the regions around the ga   corners due

to, for example, generation of bainite structure as a

result of overcooling.

These shortcomings are obviated by the second

embodiment of the invention as will be understood from

25 the following description.

Fig. 9 shows an exampl of arrangement of nozzle

headers suitable for use in carrying out the second

embodiment of th heat-treatment method of the invention.

1 Referring to Fig. 9, a hot rail 31 is in a temperature
   region not 1 ss than th Ar_3 temperature, as it has just
   b n hot-roll d or heated intentionally for the purpose of
   heat-treatment. The heating to the region not less than

5 the Ar_3 temperature is essential for obtaining a fine
   pearlite structure which provides superior anti-wear
   and anti-damage properties after accelerated cooling. In
   this embodiment, the cooling apparatus employs three
   independent nozzle headers for the purpose of cooling the

10 head portion of the rail: namely, a single header 32 for
   cooling the top surface of the rail head (referred to
   simply as "upper header", hereinunder) and a pair of
   headers 34 which are intended for cooling both side
   surfaces of the head and the lower surfaces of the jaw

15 portions (referred to as "side headers", hereinunder).
   These headers 32, 34, 34 are disposed independently
   of each other and extend in the longitudinal direction of
   the rail. The upper header has nozzles 33 adapted to
   direct a gaseous cooling medium such as air or N_2 gas

20 towards the top surface of the rail head, while the
   side headers 34, 34 have nozzles which are adapted
   to direct the cooling medium towards the side surfaces
   of the head and the lower surfaces of the jaw portions.
   In operation, the distances between the nozzles 33 and

25 the rail head is determined in accordance with the level
   of the strength to be attained, as in the case of the
   first embodiment. The cooling medium after cooling the
   top surface of the head and th upp r parts of the side

1   surfaces of the head is exhausted through gaps around

the gauge corners, while the cooling medium after cooling

the lower parts of the side surfaces of the head and

the lower surfaces of the jaw portions is discharged

5   past the root portion of the rail head. In consequence,

the cooling degree on the gauge corners are comparatively

lessened so that the overcooling tendency of the gauge

corners is prevented advantageously. In addition, the

cooling effect is uniformalized over the entire portion of

10   the surface regions of the rail head, thus ensuring a

uniform strength distribution in the rail head portion.

     A reference numeral 36 designates a nozzle

header for cooling the bottom surface of the rail (referred

to as "lower nozzle header", hereinunder). The lower

15   nozzle header 36 is extended along the length of the

upper and side nozzle headers 32, 34, and is adapted to

direct the gaseous cooling medium towards the bottom

surface of the rail 1. As shown in Fig. 9, the lower

header 36 faces the bottom surface of the rail 1, and

20   performs a function of controlling the shape of the rail 1.

     According to this embodiment shown in Fig. 9,

the gaps through which the cooling medium after the

cooling is exhausted are formed along the gauge corners

of the rail head, so that the gauge corners are not

25   directly cooled by the fresh cooling medium but by the

cooling medium which has cooled oth r portions of the rail

head. In cons quence, the cooling power on the gauge

corners is lessened as compared with thos on the top

1 surface and both side surfaces of th rail head so that

the dge corners are cooled substantially at the same rate

as the top surface and both side surfac s of the rail

head. In consequence, the undesirable generation of

5 bainite structure in the gauge corner regions is avoided.

In addition, since about half of the cooling medium

directed to the side surfaces of the head is discharged

through the gaps which extend along the gauge corners,

it becomes possible to directly apply the cooling medium

10 to the lower surfaces of the jaw portions, thus afforing

a further uniformalization of the hardness over the

surface regions of the rail head.

An explanation will be made hereinunder as to

an embodiment in which the control of the shape of the

15 rail is effectively controlled by the application of

a gaseous cooling medium from the nozzles of the lower

nozzle header onto the bottom surface of the rail.

The heat-treatment method of the invention

which relies upon the forcible local cooling of a rail

20 by the application of a gaseous medium onto the rail head

tends to cause a large temperature gradient in the rail,

particularly when the cooling is conducted only at the

head portion of the rail, resulting in a positive bend in

which the rail head is convexed upwardly as shown in

25 Fig. 12a or negative bend in which the rail head is con-

caved downwardly as shown in Fig. 12b. This bending

defect can be eliminated by applying the gaseous cooling

medium to the bottom surface of the rail under a controlled

1   condition, during the cooling of the rail head by the

    gaseous cooling m dium.

        Figs. 13 and 14 show an example of the arrange-

    ment of the apparatus for preventing the bend of the

5   rail. As shown in Fig. 14, this apparatus has an upper

    nozzle header 42 which is similar to the nozzle header

    employed in the first embodiment. Thus, the upper nozzle

    header 42 has nozzles which are arranged on a common arc

    so as to direct the cooling medium to the head of the

10 rail. The apparatus also has a lower nozzle header 43

    which is extended in the direction of the movement of the

    hot rail 1, as is the case of the upper nozzle header 42,

    so as to direct the cooling medium to the lower surface

    of the rail bottom portion, i.e., to the rail bottom

15 surface. The nozzles of the lower nozzle header 43 may be

    arranged concentrically in the vicinity of the rail 1 so

    that the cooling medium is directed to the central thick-

    walled portion of the rail bottom or may be arranged such

    that the cooling medium is distributed over the entire area

20 of the rail foot. Preferably, the ratio of the total

    nozzle area of the lower nozzle header 43 to that of the

    upper nozzle header 42 is selected to range between 1/2

    and 1/5.

        The apparatus further has a head cooling medium

25 supply line 44 which is connected at its inlet side to a

    source (not shown) of the colling medium and at its

    outlet side to the upp r nozzle headers 42 through a medium

    flow-rate adjusting valve 45. Similarly, a rail bottom

1　cooling medium supply line has an inlet end connected

to a s urc (n t shown) of th cooling medium and an

outlet end which is connected to the lower nozzle headers

43 through medium flow-rate adjusting valves 47. A bend

5　measuring device 49 is connected to bend (displacement)

detectors 48 which are disposed between adjacent lower

nozzle headers 43. An adjusting valve controller 50 is

adapted to control the opening degrees of the cooling

medium flow-rate adjusting valves 46 in accordance with

10　the detected amounts of bend. Thus, the medium flow-rate

adjusting valves 46 are operable independently so as to

adjust the flow rates of the cooling medium in accordance

with the amounts of bend of the hot rail 1. The control

of the cooling medium flow-rate adjusting valves 46 may

15　be conducted manually by an operator who can visually check

the amounts of bend on the basis of experience. A refer-

ence numeral 51 designates conveyor rollers.

During the cooling of the rail head by the appli-

cation of the gaseous cooling medium, the rates of

20　supply of the gaseous cooling medium from the lower

nozzle headers 43 are adjusted in accordance with the

result of measurement by the bend measuring device 49.

More specifically, the measurement of bend (displacement)

is commenced without delay after the feed of the rail 1

25　into the cooling apparatus. The rate of temperature

drop is great r at the bottom portion of the rail

than at the head portion of the same, immediately after

the feed f the rail into the cooling apparatus. In

1   consequence, the rail shows a large temperature gradient

     betw en the h ad and the bottom and is deflected such

     that the head is convexed upwardly, i.e., to exhibit

     the tendency of positive bend as shown in Fig. 12a.

5   When the positive bend of the rail is detected, the

     flow rate of the cooling medium from the lower nozzle

     header is decreased without delay so as to reduce the

     cooling degree on the bottom of the rail. In consequence,

     the temperature difference between the head and the

10   bottom is diminished to reduce the bend.

          As the rail temperature is lowered, the tempera-

     ture of the rail bottom comes down to the transformation

     temperature range. In this state, the rail tends to

     exhibit the negative bend as shown in Fig. 12b, due to

15   the transformation elongation of the rail bottom. When the

     negative bend is detected, the rate of supply of air to the

     lower nozzle header 43 is increased to enhance the cooling

     rate of the rail bottom. As a result, the amounts of

     elongation of the rail head and the rail bottom are sub-

20   stantially equalized, so that the bend is minimized. As

     the temperature is further lowered, the transformation

     in the rail bottom is completed and the rail head

     temperature comes down to the transformation temperature

     range. As a result, the rail again exhibits the tendency

25   of positive bend due to transformation elongation of the

     rail head. Upon detection of this tendency, the rat

     of supply of the cooling medium from the lower nozzle

     head is decreased so as to minimiz the bend.

1   In another method of effecting the control

of the rail shape through th cooling of the rail bottom

surface, a constraining d vic is provided over the entire

length of the rail so as to fix and constrain the rail

5 against bending. In operation, throughout the period of

cooling of the rail head, the cooling medium is applied to

the bottom surface of the constrained rail at a constant

flow-rate which is selected so as to minimize the

vertical bend after the completion of the heat treatment.

10 This method also permits the shape of the rail to be

controlled.

Another embodiment of the heat-treatment apparatus

for carrying out the heat-treatment method of the invention

will be described hereinunder.

15   Fig. 18 shows an embodiment of the heat-

treatment apparatus of the invention for treating a plura-

lity of rails at a time. The apparatus has a chain

transfer 112 on which a plurality of rail blanks 111a are

arranged in upright position at a pitch of ℓ_1 which is

20 equal to the interval of heat-treatment apparatus. The

supply of the rail balnks 111a to the chain transfer 112

is conducted by another chain transfer or a suitable con-

veyor means. The chain transfer 112 conveys the rail

blanks 111a intermittently such that four railblanks 111a

25 are brought into the heat-treatment zone at a time. The

rail blanks which have been brought into the heat-

treatment zon is designated at numerals 111b.

The apparatus further has centering/clamping

1   devices provided with clamping claws 121. The centering/

clamping devices 121 are adapt d to be projected above the

conveyor plane during cooling operation but are retracted

below the same before the cooling operation is commenced.

5   Similarly, nozzles 118, 119 for cooling the upper portions

of the rail blanks are retracted upwardly by means of a

lifting frame 114 operated by lifting gears 115 carried by

a column 113 independent from the chain transfer 112.

As the rail blanks 111a are brought by the chain

10   transfer 112 to the heat-treatment positions 111b, the claws

121 of the centering devices 122, which are arranged at

a pitch of 1.5 m to 4 m along each row of the rail blank

111b in the heat-treatment position, are closed to clamp

respective rail blanks 111b such that the neutral axes of

15   respective rail blanks 111b are aligned with the axes of

the cooling nozzles 118, 120 of respective rows. Then,

the claws 121 of the clamping device 123 are lowered so

that the legs of each rail blank 111b are pulled downward-

ly by the claws 121, whereby the rail blanks 111b are

20   fixed onto the chain transfer 112.

The illustrated embodiment employs a head cooling

device which comprises the columsn 113, lifting frame 114,

head top cooling nozzles 118 secured to the lifting

frame 114, lifting frame 116 vertically movably carried

25   by the lifting frame 114, and head side cooling nozzles

119 attach d to the lifting fram 116. The h ad top

cooling nozzles 118 are held by the lifting frame 114,

while the head side cooling nozzles 119 are held by the

1 lifting frame 116. After the nozzles are s t at pres 1 ct-
ed 1 vels by the lifting d vice 115, th valves of air
supply lines for respective rows are opened to jet the
cooling air, thereby rapidly cooling the head portions of
5 respective rail balnks 111b, more particularly, the top
portions, gauge corners, side surfaces of the heads, jaws
and undersides of the jaws of respective rail blanks 111b.
The control of the colling rate at the rail head portion,
necessary for the heat-treatment, is conducted by adjusting
10 the distance between the head top cooling nozzle 118 and
the head to surface of each rail blank 111b, as well as
adjustment of the air flow rate which is conducted by a
flow-rate adjusting valve 125. The cooling rate of the
side surface regions of the rail head portion is controlled
15 by adjusting the flow rate of cooling air jetted from the
head side cooling nozzles 119 by means of an air flow-
rate control valve 124. The nozzles have diameters ranging
between 2.0 and 9.0 mm. After the setting of the head
top cooling nozzles 118 at the preselected height above
20 the head top surface of the rail blanks 111b, the head side
cooling nozzles 119 are brought to positions where they
correctly face the side surfaces of the rail head, by
the operation of the lifting frame 116 which in turn is
operated by a lifting gear 117. Preferably, the ratio
25 between the total nozzle area of the head top cooling
nozzle and that of the head side cooling nozzles ranges
between 0.7 and 1.2. The clearance between the head top
cooling device and the head side cooling d vice, i.e.,

1   devices provided with clamping claws 121. The centering/
clamping devices 121 are adapted to be project d above the
conveyor plane during cooling operation but are retracted
below the same before the cooling operation is commenced.

5   Similarly, nozzles 118, 119 for cooling the upper portions
of the rail blanks are retracted upwardly by means of a
lifting frame 114 operated by lifting gears 115 carried by
a column 113 independent from the chain transfer 112.

As the rail blanks 111a are brought by the chain

10 transfer 112 to the heat-treatment positions 111b, the claws
121 of the centering devices 122, which are arranged at
a pitch of 1.5 m to 4 m along each row of the rail blank
111b in the heat-treatment position, are closed to clamp
respective rail blanks 111b such that the neutral axes of

15 respective rail blanks 111b are aligned with the axes of
the cooling nozzles 118, 120 of respective rows. Then,
the claws 121 of the clamping device 123 are lowered so
that the legs of each rail blank 111b are pulled downward-
ly by the claws 121, whereby the rail blanks 111b are

20 fixed onto the chain transfer 112.

The illustrated embodiment employs a head cooling
device which comprises the columsn 113, lifting frame 114,
head top cooling nozzles 118 secured to the lifting
frame 114, lifting frame 116 vertically movably carried

25 by the lifting frame 114, and head side cooling nozzles
119 attached to the lifting frame 116. The head top
cooling nozzles 118 are held by the lifting frame 114,
while the head side cooling nozzles 119 are held by the

1 lifting fram 116. After th nozzles are set at pr s lect-
   ed levels by th lifting d vice 115, the valv s of air
   supply lines for respective rows are opened to jet the
   cooling air, thereby rapidly cooling the head portions of
5 respective rail balnks 111b, more particularly, the top
   portions, gauge corners, side surfaces of the heads, jaws
   and undersides of the jaws of respective rail blanks 111b.
   The control of the colling rate at the rail head portion,
   necessary for the heat-treatment, is conducted by adjusting
10 the distance between the head top cooling nozzle 118 and
   the head to surface of each rail blank 111b, as well as
   adjustment of the air flow rate which is conducted by a
   flow-rate adjusting valve 125. The cooling rate of the
   side surface regions of the rail head portion is controlled
15 by adjusting the flow rate of cooling air jetted from the
   head side cooling nozzles 119 by means of an air flow-
   rate control valve 124. The nozzles have diameters ranging
   between 2.0 and 9.0 mm. After the setting of the head
   top cooling nozzles 118 at the preselected height above
20 the head top surface of the rail blanks 111b, the head side
   cooling nozzles 119 are brought to positions where they
   correctly face the side surfaces of the rail head, by
   the operation of the lifting frame 116 which in turn is
   operated by a lifting gear 117. Preferably, the ratio
25 between the total nozzle area of the head top cooling
   nozzle and that of the head side cooling nozzles ranges
   between 0.7 and 1.2. Th clearanc between the head top
   cooling device and th head side cooling device, i.e.,

1   the air exhausting gap, is 15 to 100 mm.

        The heat-treatment apparatus furth r has rail
bottom cooling nozzles 120 for respective rows, to which
the cooling air is supplied through respective valves.

5   These valves are opened so that cooling air is jetted from
the rail bottom cooling nozzles 120, thereby cooling the
bottoms of respective rail blanks 111b concurrently with
the cooling of the rail heads. The rate of cooling of the
rail bottoms is controlled so as to match for the cooling

10   rate of the rail heads through adjustment of the cooling
air flow rate by the air flow-rate adjusting valves 126,
thereby minimizing the bend of the rails after the heat
treatment. The ratio of total area of nozzles on said
bottom cooling means to the total area of nozzle on the

15   head top cooling means and the head side cooling means is
1/2 - 1/5.

        During the heat treatment, the temperature
of the head of each rail blank 111b is measured by a
temperature detector (not shown) and, using the thus

20   detected temperature, the cooling time required by each
rail is computed by a cooling time control system. The
supply of cooling air to each rail blank 111b is
ceased independently, after elapse of the thus computed
cooling time.

25   When the cooling is finished for all rail
blanks 111b in the cooling zone, the cooling nozzles 118,
119 are retract d upwardly, while the claws 121 of the
clamping devices 123 are opened and then retracted

1   downwardly to a l vel below the conveyor plan of the

chain transf r 112. Then, four heat-tr at d rail blanks

111b are convey d by the chain transfer 112 out of the

cooling zone. The rails which have been brought out of

5   the cooling zone are designated by a numeral 111c. These

rails 111c are then forwarded to a next step by another

transfer which is not shown.

Although the embodiment shown in Fig. 18 is

designed for treating four rail blanks at a time, the

10   number of the rail blanks treated at one time can be

selected freely in accordance with the conditions, e.g.,

the number of rail blanks obtained from one ingot. The

described heat treatment can be conducted equally well

regardless of whether only one rail blank is treated

15   or a plurality of rail blanks are treated simultaneously.

If the width of the apparatus in the direction orthogonal

to the direction of movement of chain transfer is large

enough to accommodate two or more short rail balnks, the

arrangement may be such that two or more rows of rails,

20   each containing two or more short rail blanks, are

heat-treated simultaneously.

Although the embodiment has been described

with specific reference to rail blanks in the state

immediately after hot rolling, the method and apparatus

25   of this embodiment can apply equally well to rail blanks

which have been reheated, although in such a case energy

is consumed wastefully for the reheating.

As has been described, this embodiment of th

1 heat-treatment apparatus has a plurality of cooling zones

arranged in a side-by-side fashion and each having a length

corresponding to the length of the rail blank to be heat-

treated. The supply and discharge of the railblanks to

5 and from respective cooling zones are conducted by a

single chain transfer. The heat-treating conditions of

each cooling zone can be adjusted independently of other

cooling zones. By virtue of these features, this embodiment

offers the following advantages:

10 (1)   The apparatus as a whole can have a compact

construction, thus reducing the installation cost and

space.

(2)   Running cost for the cooling operation is low

because of elimination of the invalid cooling zone.

15 (3)   Since the cooling time of each row, i.e., each

cooling zone, can be controlled independnetly of other rows,

the heat rreatment can be effected stably despite any

longitudinal temperature gradient of the rails after the

hot rolling.

20 (4)   Cooling rate can be controlled over a wide

range through adjusting one or both of the air flow rate

and the distance between the cooling air nozzle and the

rail. It is, therefore, possible to produce rails of

a variety strength levels from medium to high levels with

25 different sizes and types of steel rail blanks, by means

of a single heat-treating apparatus.

(5)   The bending of rail during cooling is minimized

by virtue of the balance of cooling effect d n the bottom

1 side of the rail. This facilitat s th transportation to
th n xt step of process and reduc s the load in subsequent
straightening operation.

Example 1

5   Rail blanks of 132 lbs/yard and 136 lbs/yard
having chemical compositions shown in Table 1 were pre-
pared by rolling. These rail blanks in as-rolled state,
still remaining at a temperature not less than the auste-
nite field, were subjected to the heat treatment in accord-

10 ance with the first embodiment of the invention, by means
of the heat-treatment apparatus explained before in connec-
tion with Figs. 1 and 2.

Table 1

(% wt)

Rolled Rail	C	Si	Mn	P	S	Cr	Nb	Ceq
132 lbs/yard	0.79	0.23	0.88	0.024	0.009	–	–	0.946
136 lbs/yard	0.78	0.83	0.75	0.015	0.0049	0.606	0.006	1.061

        The cooling of the 132 lbs/yard rail blank was
conducted to obtain hardness of Hv ≥ 350 down to the depth

15 of 10 mm from the rail head top surface, under the condi-
tion of Ceq = 0.946. The cooling degree F and the nozzle
header pressure H were about 26 and 1500 mmH_2O (gauge
pressur), respectiv ly, while the flow rat Q was select d
to be 41 N m^3/m·min. Using these values, th distance H

20 was calculat d to be about 60 mm from th formula (1).

1 Using a measured temperature value of θ_s = 800°C, the

cooling time was calculated from the formula (2) to be

118.8 seconds or longer. The cooling time, therefore, was

selected to be 150 seconds. Fig. 4 shows the hardness

5 distribution in a cross-section of the head of the rail

which has been heat-treated as above. From this Fig. 4,

it was seen that a fine pearlite structure meeting the

condition of Hv > 350 was obtained down to the depth of

10 mm under the surface.

10   The cooling of the 136 lbs/yard rail blank was

conducted to obtain hardness of Hv ≥ 370 down to the

depth of 10 mm from the rail head top surface, under the

condition of Ceq = 1.061. The cooling degree F and the

nozzle header pressure H were 27 and 1500 mmH_2O (gauge

15 pressure), respectively, while the flow rate Q was

selected to be 41 N m^3/m·min. Using these values, the

distance H was calculated to be about 58 mm from the

formula (1). Using a measured temperature value of

θ_s = 780°C, the cooling time was calculated from the

20 formula (2) to be 112.1 seconds or longer. The cooling

time, therefore, was selected to be 140 seconds. Fig. 5

shows the hardness distribution in a cross-section of the

head of the rail which has been heat-treated as above.

From this Fig. 5, it was seen that a fine pearlite struc-

25 ture meeting the condition of Hv > 375 was obtained

down to the depth of 10 mm under th surface, and no

harmful structure such as bainite structure was obs rved.

1 Example 2

A rail was heat-treated in accordance with the second embodiment of the heat-tr atment method of the invention shown in Fig. 9 which employs different condition of application of the cooling gas from that in the

5 first embodiment. The rail having the chemical composition shown in Table 2 was prepared by rolling, and the as-rolled rail still remaining at temperature region not less than the austenite field was subjected to the heat treatment.

Table 2

(wt %)

Rolled rail	C	Si	Mn	P	S
132 lbs/yard	0.79	0.23	0.88	0.024	0.009

10 The heat treatment was conducted under two different conditions: namely, conditions for obtaining hardnesses of Hv > 350 and Hv > 360 down to the depth of 100 mm from the head surface. Figs. 10a and 10b show the hardness distributions in cross-sections of the heads

15 of thus heat-treated rails. Figs. 11a and 11b show the result of the heat-treatment in accordance with the second embodiment, in comparison with those attained by the first embodiment of the invention.

From th s Figures, it was that the rails

20 h at-tr ated in accordance with the second embodiment

1   provided the aimed hardness levels of Hv ≥ 350 and Hv ≥ 360

from the top to jaws of the rail head, and the hardness

in the regions around the underside of the jaws sub-

stantially reach the required levels. The whole area of

5   the cross-section of the rail heads showed fine pearlite

structures devoid of harmful structure such as bainite

structure.

Example 3

A practical example of the embodiment for mini-

10 mizing the bend of the rail during heat treatment for

obtaining desired strength will be explained hereinunder.

A 132 lbs/yard roll having a chemical composition

shown in Table 3 was prepared by hot rolling, and the

as-rolled rail was treated in accordance with the embodiment

15 in which the bend of the rail along the length thereof

is minimized by the controlled application of the cooling

air to the bottom surface of the rail.

Table 3

Ch No.	C	Si	Mn	P	S
C42526	0.79	0.23	0.88	0.024	0.009

Fig. 15 shows the change in the flow rat of

cooling air appli d for the purpose of continuous cooling

20 aft r the whole length of the rail has been brought into

1 the cooling apparatus. The cooling air from the upper

nozzles was suppli d at a constant rate of 40 Nm^3/min·m

per unit length (1 m) of the rail, for attaining a

strength meeting the condition of Hv ≳ 350 as measured at

5 a point which is 5 mm below the head top surface, while

the flow rate of air from the lower nozzles were changed

in accordance with the measured amount of bend.

      Fig. 16 shows the change in the amount of bend

per rail length of 6 m during the continuous cooling.

10   The as-rolled rail still possessing temperature

of about 800°C as measured at the head exhibited a positive

bend of about 10 mm immediately after it was brought into

the cooling apparatus. The rail then rapidly changed its

state into negative bend, as a result of application of the

15 cooling air from the upper nozzles. As this negative

bend was detected by the bend measuring device, the supply

of air from the lower nozzles was started for cooling the

bottom of the rail. This cooling of the rail bottom

was conducted with the maximum cooling air flow rate which

20 was about 0.3 to the air flow rate from the upper nozzles,

in order to create a tendency of positive bend. The rail

began to show a positive bend when the cooling of the

rail bottom was continued for a while, e.g., about one

minute. In response to this change in the state of the

25 rail, the flow rate of the cooling air from the lower

nozzles was decreased and the cooling was complet d in four

minutes. Meanwhile, the upper nozzle header suppli d

the c oling air at the constant rate of 40 Nm^3/min·m to

1   continuously cool the rail head. In this example, the bend

of the rail was maintained within a small value of 3 mm

per rail length of 6 m.

Fig. 17 shows the hardness distribution in the

5 · cross-section of the head of the rail heat-treated by the

method described. It was seen that the a high hardness

Hv around 350 is obtained down to the depth of 10 mm or

more from the head top surface of the rail. This means

that a high strength is attained from the surface region

10   towards the inner side of the rail head. The structure

was substantially uniform over the whole area. In parti-

cular, fine pearlite structure was obtained in the surface

region of the rail head, without suffering from any harmful

structure such as bainite or martensite structures.

WHAT IS CLAIMED IS:

1. A meth d of h at-tr ating a rail for producing rails of a variety of strength levels from medium valu to high value, said method comprising the steps of:

preparing a steel rail maintained at a high temperature region not lower than the austenite field, and disposing a nozzle means around the head of said rail so that said nozzle means direct a gaseous cooling medium towards said head of said rail;

determining the distance between said nozzle means and said head of said rail in accordance with the hardness level to be attained in said head of said rail and the carbon equivalent of the steel constituting said rail;

moving said nozzle means so that said distance is attained between said nozzle means and said head of said rail; and

directing said gaseous cooling medium towards said head at a predetermined flow rate and for a predetermined time so as to cool said head of said rail thereby attaining the desired strength level in said head of said rail.

2. A method of heat-treating a rail according to claim 1, wherein said distance H between said nozzle means and said head of said rail is determined in accordance with the following formula, from said carbon equivalent Ceq of said st el, the hardness Hv to be obtained, flow rate of air Q to be used in the cooling and the pr ssure P

in an upper header constituting said nozzle means;

$$Hv = 10^n + (200 \text{ ceq} - 190)$$

$$n - 2.4993 + 0.039887 \log F - 0.0051918 \log F^2$$

where,

Hv: hardness (Vickers hardness at 10 Kg) to be
attained in said head of said rail regarding
the depth down to 10 mm from the rail head
surface, indicative of the strength of said rail

Ceq: Carbon equivalent of the steel given by:

$$Ceq = C + Mn/6 + Si/24 + Ni/40 + Cr/5 + Mo/4 + V/14$$

F: cooling degree given by $F = Q \cdot \sqrt{P}/H$

Q: flow rate (m^3/m·min) of the gaseous cooling medium
applied to unit length of rail

P: pressure in nozzle header (mmAq, nozzle resistance
coefficient $f = 0.85$)

H: distance between nozzle header and the said top
surface of said head of said rail (mm)

n: a coefficient determined by the type of nozzle.

3.   A method of heat-treating a rail according to
claim 1, wherein the cooling by the application of
said gaseous cooling medium is conducted for a time
duration which is not shorter than a time given by the
following formula:

$$0.336\theta_s - 150 \text{ sec}$$

wher , θ_s represents the temperature at the
surface region of said head of said rail in th state
before the cooling.

4.   A method of heat-treating a rail according to
claim 1, further comprising directing said gaseous cooling
medium by another nozzle means towards the bottom
surface of said rail during the cooling of said head of
said rail, thereby minimizing the bend of said rail along
the length thereof.

5.   A method of heat-treating a rail according to
claim 1, wherein said nozzle means for cooling said head
of said rail is arranged in the form of an arc which is
centered at said head of said rail.

6.   A method of heat-treating a rail according
to claim 1, wherein said rails are made of a steel which
contains 0.55 to 0.85 wt% of C, 0.20 to 1.20 wt% of Si,
0.50 to 1.50 wt% of Mn and the balance Fe, and further
containing, as required, 0.10 to 0.80 wt% of Cr and at
least one selected from a group consisting of Nb, V, Ti,
Mo, Cu and Ni.

7.   A method of heat-treating a rail according
to claim 1, wherein, during the cooling, said rail is
moved continuously, intermittently or reciprocatingly in
the cooling apparatus having said nozzle means for cooling
said head of said rail.

8.   A method f heat-treating a rail according to
claim 1, wherein said head of the heat-treated rail can
have a variety of strength levels corresponding to

hardness range of Hv 320 to 400 at the surface of said head of said rail.

9.   A method of heat-treating a rail according to claim 1, wherein said rail maintained at a temperature in the austenite field is a rail which has been hot-rolled or heated up for the purpose of the heat treatment.

10.   A method of heat-treating a rail according to claim 1, wherein the cooling by said gaseous cooling medium is continued until the transformation into fine pearlite structure is completed substantially over the entire portion of said head of said rail.

11.   A method of heat-treating a rail for producing rails of a variety of strength from medium value to high value, said method comprising:

preparing a steel rail maintained at a temperature within the austenite field and arranging a nozzle means around the head of said steel rail so that said nozzle means directs a gaseous cooling medium towards said head of said rail;

determining the distance between said nozzle means and said head of said rail in accordance with both the hardness to be obtained in the depth region of down to 10 mm from the surface of said head of said rail and the carbon equivalent of the steel constituting said rail;

moving said nozzle to attain said distanc betwe n said nozzle means and said head of said rail; and

directing said gaseous cooling m dium from said nozzle means towards said h ad of said rail so as to attain

the desired hardness of said head of said rail;

wher in the step of directing said gaseous cooling medium is conducted in such a manner that said gaseous cooling medium after cooling said head of said rail is exhausted through both gaps formed near the gauge corners of said head of said rail and the root and also through the gaps formed near the roots of said head of said rail.

12. A method of heat-treating a rail according to claim 11, wherein said nozzle means includes a head top cooling nozzle for cooling the top surface of said head of said rail and a pair of head side cooling nozzles spaced from said head top cooling nozzle and arranged on right and left sides of said head of said rail, and wherein a part of said gaseous cooling medium after the cooling is exhausted through discharge gaps formed between said head top cooling nozzle and both head side cooling nozzles.

13. A method of heat-rreating a rail according to claim 11, wherein said distance H between said nozzle means and said head of said rail is determined in accordance with the following formula, from said carbon equivalent Ceq of said steel, the hardness Hv to be obtained, flow rate of air Q to be used in the cooling and the pressure P in an upper header constituting said nozzle means:

$$Hv = 10^n + (200\ Ceq - 190)$$

$$n = 2.4993 + 0.039887\ \log F - 0.005198\ \log F^2$$

where,

Hv: hardness (Vickers hardness at 10 Kg) to be

attained in said head of said rail regarding the

depth down to 10 mm from the rail head surface,

indicative of the strength of said rail

Ceq: Carbon equivalent of the steel given by:

$$Ceq = C + Mn/6 + Si/24 + Ni/40 + Cr/5 + Mo/4 + V/14$$

F: cooling degree given by $F = Q \cdot \sqrt{P}/H$

Q: flow rate ($m^3/m \cdot min$) of the gaseous cooling medium

applied to unit length of rail

P: pressure in nozzle header (mmAq, nozzle resist-

ance coefficient $f = 0.85$)

H distance between nozzle header and the said top

surface of said head of said rail

n: coefficient determined by the type of the nozzle.

14.   A method of heat-treating a rail according to claim 11, wherein the cooling by the application of said gaseous cooling medium is conducted for a time duration which is not shorter than a time given by the following formula:

$$0.336\theta_s - 150\ \text{sec}$$

where, θ_s represents the temperature at the surface region of said head of said rail in the state before the cooling.

15.   A method of heat-treating a rail according
to claim 11, further comprising directing said gaseous
cooling medium by another nozzle means towards the bottom
surface of said rail during the cooling of said head of said
rail, thereby minimizing the bend of said rail along the
length thereof.

16.   A method of heat-treating a rail according to
claim 11, wherein said nozzle means for cooling said head
of said rail is arranged in the form of an arc which is
centered at said head of said rail.

17.   A method of heat-treating a rail according to
claim 11, wherein said rails made of a steel which contains
0.55 to 0.85 wt% of C, 0.20 to 1.20 wt% of Si, 0.50 to
1.50 wt% of Mn and the balance Fe, and further containing,
as required, 0.20 to 0.80 wt% of Cr and at least one select-
ed from a group consisting of Nb, V, Ti, MO, Cu and Ni.

18.   A method of heat-treating a rail according to
claim 11, wherein, during the cooling, said rail is
moved continuously, intermittently or reciprocatingly in
the cooling apparatus having said nozzle means for cooling
said head of said rail.

19.   A method of heat-treating a rail according to
claim 11, wherein said head of the heat-treated rail
can have a variety of strength levels corresponding to
hardness range of Hv 320 to 400 at the surface of said
head of said rail.

20.   A method of heat-treating a rail according to
claim 11, wherein said rail maintained at a temperature in

the austenite field is a rail which has been hot-rolled or heated up for the purpose of the heat treatment.

21.   A method of heat-treating a rail according to claim 11, wherein the cooling by said gaseous cooling medium is continued until the transformation into fine pearlite structure is completed substantially over the entire portion of said head of said rail.

22.   A heat-treatment apparatus for carrying out a heat-treatment method on a rail for producing rails of a variety of strength levels from medium value to high value, said apparatus comprising:

        conveyor means for conveying said rail;

        a rail head cooling means having a plurality of nozzles arranged around the head of said rail and adapted to direct a gaseous cooling medium towards said head of said rail; and

        a rail bottom cooling means disposed under said conveyor means and adapted to direct said gaseous cooling medium towards the bottom surface of said rail;

        wherein said rail head cooling means is movable for controlling the distance between said nozzles and said head of said rail.

23.   An apparatus according to claim 22, wherein said nozzles of said rail head cooling means are disposed on a semi-circular or substantially inverted U-shaped head r surrounding said head of said rail.

24.   An apparatus according to claim 22, wherein said rail head cooling means has an upper header provided with

head top cooling nozzles for cooling the top of said

head of said rail and a pair of side headers which are

spaced from said head top cooling nozzles and adapted to

cool both side surfaces of said head of said rail and the

underside of jaws of said head of said rail.

25.   An apparatus according to claim 22, wherein the

ratio of the total area of said nozzles on said rail

bottom cooling means to the total area of said nozzles on

said rail head cooling means ranges between 1/2 and 1/5.

26.   A apparatus according to claim 22, further

comprising means for constraining the rail so that the

rail is substantially prevented from bending during

cooling.

27.   A heat-treatment apparatus for carrying out a

heat-treatment method of a rail for producing rails of a

variety of strength levels from medium value to high

value, said apparatus comprsiing:

a carrier type conveyor means adapted to move

in the direction perpendicular to the longitudinal direc-

tion of said rail;

a head top cooling means including columns

disposed above said conveyor means independently from said

conveyor means, a lifting frame attached to said column,

a plurality of gas jetting nozzles mounted on said

lifting frame and adapted to cool the head of said rail,

and valves for adjusting the flow rates of said gas in

respective nozzles;

h ad sid cooling means including a plurality

of gas jetting nozzles v rtically movably attached to said

lifting fram and adapted to cool both side surfaces of

said head of said rail, and valves for adjusting the flow

rates of said gas in respective nozzles;

a rail bottom cooling means including a plurality

of gas jetting nozzles disposed below said conveyor means

and adapted to cool the bottom surface of said rail, and

valves for adjusting the flow rates of said gas in

respective nozzles; and

vertically movable rail positioning/constraining

means disposed under said conveyor means.

28.   An apparatus according to claim 27, wherein the

gaps between said head top cooling means and said head side

cooling means constitute passages through which the gas

after cooling is exhausted.

29.   An apparatus according to claim 27, wherein the

ratio of total area of nozzles on said rail bottom cooling

means to the total area of nozzles on said head top cooling

means and said head side cooling means ranges between 1/2

and 1/5.

30.   An apparatus according to claim 27, wherein said

nozzles have diameters ranging between 2.0 and 9.0 mm.

31.   An apparatus according to claim 27, wherein

the ratio of the total area of nozzles on said head top

cooling means to the total area of nozzles on said head side

cooling means ranges between 0.7 and 1.2.

32.   An apparatus according to claim 28, wherein the

size of said gap constituting the passages for said gas

rang s between 15 and 100 mm.

FIG. I

FIG. 2

FIG. 3

POSITION		DEPTH FROM SURFACE
1 :	CENTER PORTION	25 mm
2 :	CENTER PORTION	5 mm
3 :	GAUGE CORNER	5 mm

CONTROLLED COOLING

FIG. 4

FIG. 5

FIG. 6a

FIG. 6b

FIG. 6a

FIG. 6b

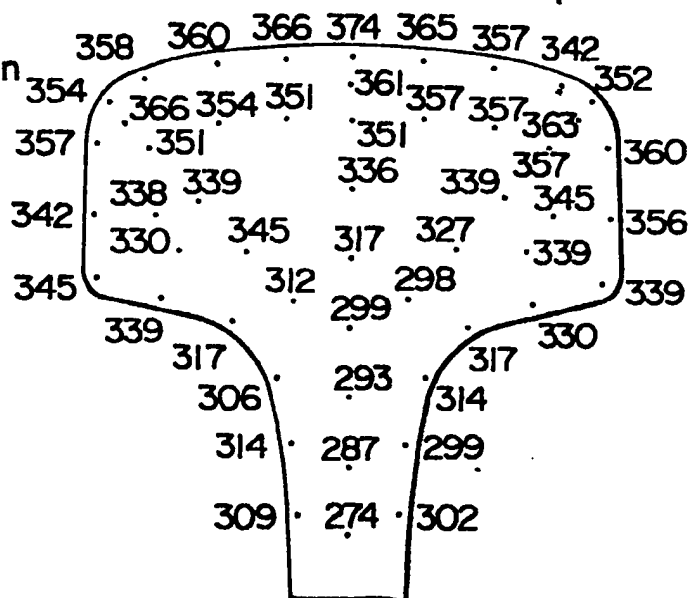# FIG. 7a

H = 50mm

Q = 41Nm³/min

P = 1500 mmAq

F = 31.8

θi = 800°C

τc = 140S

358 360 366 374 365 357 342
354 366 354 351 361 357 357 363 352
357 351 351 357 345 360
338 339 336 339 357 356
342 330 345 317 327 339
345 312 299 298 339
339 293 317 330
317 314
306
314 287 299
309 274 302

FIG. 7b

H = 20mm

Q = 41Nm³/min

P = 1500 mmAq

F = 79.4

θi = 800°C

τc = 140S

370 370 366 380 370 366 370
370 372 366 366 370 362 376 360
365 354 363 370 370 361
348 351 344 360 370 351 360
342 339 327 335 342
339 327 326 348
339 327 348 326 339
327 314 319
328 345 330
336 336 330

FIG. 8

HEAD SURFACE

GAUGE CORNER

HEAD SIDE

JAW

JAW UNDERSIDE

ROOT

WEB

FIG. 9

33   32

34

35

31

36

FIG. IOa

H = 5Qmm

Q = 4 INm³/min

P = 1500mmAq

F = 31.8

θi = 800°C

τc = 140S

FIG. IOb

H = 20mm

Q = 4 INm³/min

P = 1500mmAq

F = 79.4

θi = 800°C

τc = 140S

FIG.11a

SECOND EMBODIMENT

FIRST EMBODIMENT

WEB ROOT JAW UNDER-SIDE | HEAD UNDER-SIDE AND JAW | GAUGE CORNER | CENTER HEAD SURFACE | GAUGE CORNER SIDE | HEAD JAW AND JAW UNDERSIDE | ROOT WEB

400

350

300

HARDNESS AT POSITION 1 TO 1.5mm BELOW SURFACE OF RAIL HEAD (Hv)

FIG. IIb

Y-axis: HARDNESS AT POSITION 1 TO 1.5mm BELOW SURFACE OF RAIL HEAD (Hv)

Y-axis values: 300, 350, 400

X-axis labels: WEB, ROOT, JAW UNDER-SIDE, HEAD SIDE AND JAW, GAUGE CORNER, CENTER HEAD SURFACE, GAUGE CORNER SIDE, HEAD JAW AND JAW UNDERSIDE, ROOT, WEB

Legend: SECOND EMBODIMENT, FIRST EMBODIMENT

FIG. 12a

FIG. 12b

FIG. 13

FIG. 14

FIG. 15

FIG. 16

FIG. 17

HC : ● HEAD CENTER
GR : ○ } GAUGE CORNER
GL : △ }

FIG. 18